


中型均匀光源系统



技术指标

描述及信号	USS-1200	USS-2000	Custom Systems
步进均匀光源系统 USS-S)	AS-02448-201	AS-02444-201	Upon request
连续均匀光源系统(USS-C)	AS-02448-301	AS-02444-301	Upon request
系统包括	USS-1200	USS-2000	
均匀光源积分球	AS-02448-000	AS-02444-000	
内部灯 35 w lamp*, IHLS-100-035	AS-02630-000	AS-02630-000	
预设电流电源*, LPS-100-0307	AS-02600-307	AS-02600-307	
外部卤钨灯*, EHLS-100-100R	AS-02630-100	AS-02630-100	
预设电流电源*, LPS-100-0833	AS-02600-833	AS-02600-833	
光度探测器, SDA-050-P-RTA-	AS-02522-401	AS-02522-401	
可变衰减器 (C Series), VA-100-SC	AS-02450-100	AS-02450-100	
电机控制器* (C Series), MC-1000	AS-02609-000	AS-02609-000	
辐射度/光度计*, SC-6000	AS-02702-000	AS-02702-000	

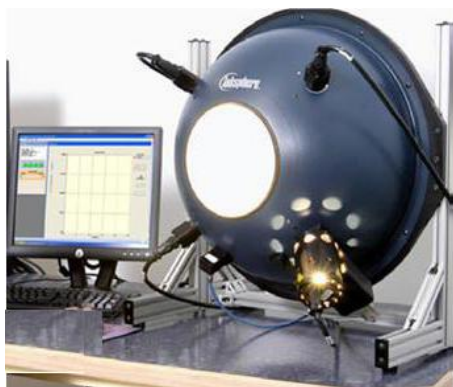

系统特性和性能

技术指标差别	USS-1200S	USS-1200C	USS-2000S	USS-2000C
亮度范围 (cd/m ²)	10, 20, 30, 40	0-40	4.6, 9.2, 13.8, 18	0 - 18
峰值亮度 mW/cm ² srum @0.9mm)	98.5	98.5	55	55
球直径	12 in (30 cm)	12 in (30 cm)	20 in (50 cm)	20 in (50 cm)
出口直径	4 in (10 cm)	4 in (10 cm)	8 in (20 cm)	8 in (20 cm)
灯总成	Qty 4, 35 W	Qty 1, 100 W Qty 3, 35 W	Qty 4, 35 W	Qty 1, 100 W Qty 3, 35 W
灯电源	Qty 4, 35 W lamps	Qty1, 100W lamp Qty 3, 35 W lamp	Qty 4, 35 W lamp	Qty 1, 100 W lamp Qty 3, 35 W lamp
电流稳定度	3.07 A +/- 0.1%	8.33 A +/- 0.1% 3.07 A +/- 0.1%	3.07 A +/- 0.1%	8.33 A +/- 0.1% 3.07 A +/- 0.1%
球尺寸(W x D x H).	17.1x11.3x19.7 in (43.4x28.7x50cm)	17.1x11.3x19.7 in 43.4x28.7x50cm)	24 x 18.5 x 23.8 in (61 x 47 x 60 cm)	24 x 18.5 x 23.8 in (61 x 47 x 60 cm)
机箱尺寸	19.7x21.7x21.9 in (50 x 55 x 56 cm)	19.7x21.7x 21.9 in (50 x 55 x 56 cm)	19.7x21.7 x 21.9 in (50 x 55 x 56 cm)	19.7x21.7 x 21.9 in (50 x 55 x 56 cm)